



MARKING DETAILS

BABCOCK SUPPLY	
3000 L	10000 L
4500 L	11360 L
5900 L	13640 L
8800 L	18800 L
9100 L	T
MAXIMUM BURIAL DEPTH 15.5m	
NON-SLIP ASKIP - RUMBLE	

CAST IN CONCRETE INLET END BESIDE ACCESS

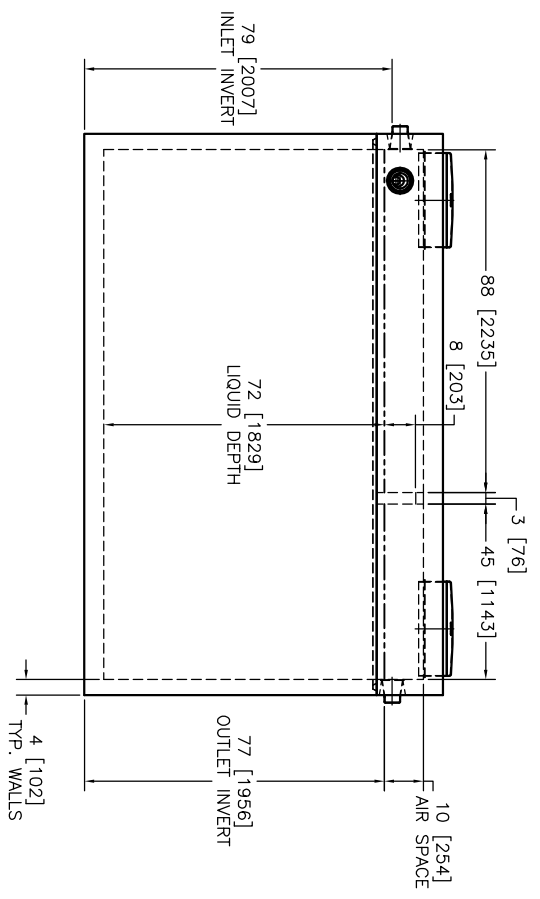

- Standard Construction - 3000 G / 13640 L pump chamber
 Concrete: 35 MPa at 28 days, 5-6% air entrainment, 0.45 water/cement ratio
 Reinforcing: Rebar G400W, 10m & 15m - 1" [25mm] min. concrete coverage
 Structural fibre - virgin copolymer polypropylene
 Liquid Depth: 72" [1829mm]
 Capacity: 3498 G [15902 L]
- Notes:
- Inlet baffle - N/A
 - Outlet device - N/A
 - Partition wall is monolithically cast with side walls and floor
 - DO NOT ENTER DANGER NE PAS ENTRER tags on H.D.P.E. access covers
 - Inlet marked on appropriate end
 - 3/4" [19mm] butyl sealant used to seal lid to tank
 - Tank is assembled on site
 - Above ground installation not permitted
 - Inlet accept NPS-4 pipe (rubber pipe seals)
 - Lid weight = 7510 lbs [3406 kg]
 - Tank weight = 18115 lbs [8215 kg]
 - Assembled weight = 25625 lbs [11621 kg]
 - Maximum burial depth = 60" [1524 mm]
 - Excavate hole approximately 12" [305 mm] larger than outside of tank

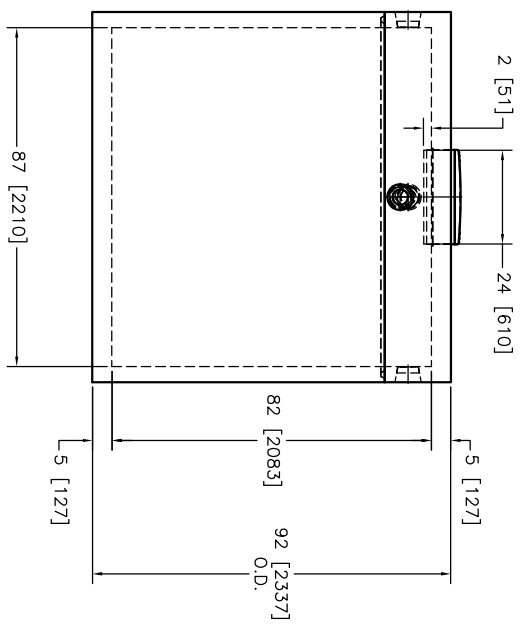

TANK MODEL #

3500 GALLON / 15900 LITRE

HOLDING TANK

3000GHOLDING

DWG #